


ALUMILUX™ I WALL SCONCE

E41540 | E41542 | E41544


- ETL/cETL IP65
- LED 3000K, CRI 90+
- Wet Location
- Title 24 for outdoor use
- Dimmable with ELV Dimmer
- Available as: 1-Light, 2-Light, and 3-Light

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____

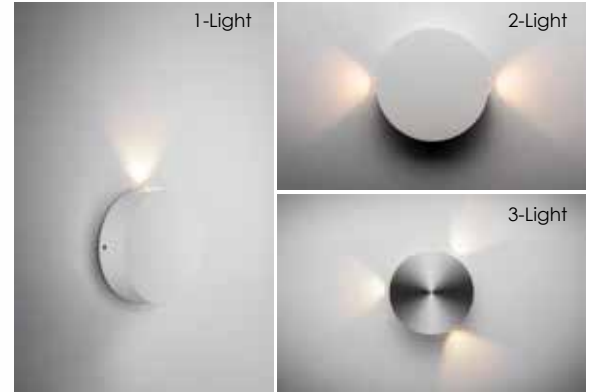

PRODUCT DESCRIPTION

Bring the outdoors inside with our line of Architectural high quality interior and exterior wall sconces. European in design and machined out of blocks of solid Aluminum, these sconces have both the look and quality expected for the discriminate buyer. High powered LEDs create dramatic light effects and most are approved for wet location applications.



MEASUREMENT

DIMENSIONS : 4.75"W x 5"H x 1.5"EXT
 HANGING WEIGHT : 1.54 Lb
 HCO : 2.5"
 BP : 3.5"W x 0.4"H

LAMPING

MODEL	BULB TYPE	CRI	LUMENS	COL TEMP.	DIMMABLE	INPUT
E41540	(1) 4W PCB LED (Integrated)	90+	280	3000K	ELV	120V
E41542	(2) 4W PCB LED (Integrated)	90+	560	3000K	ELV	120V
E41544	(3) 4W PCB LED (Integrated)	90+	840	3000K	ELV	120V

FINISHES OPTIONS:

Satin Aluminum (SA)
 White (WT)



MATERIAL:

Aluminum

AVAILABLE MODELS:

E41540 | E41542 | E41544

RATINGS:

ETL cETL IP65
 Wet Location
 ADA



ADDITIONAL:

RATED LIFE: 50,000 Hours
 OPERATING TEMP: -20° C (-4°), 40°C (104°F)
 PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product